

VULCAN PAVING BREAKER TOOLS

"Power-Matched" to transmit the full power of modern hard-hitting breakers Vulcan Tools are made to give the user maximum performance at minimum cost.

Satisfaction is fully guaranteed for your protection.

Super-service moil point



Catalog Numbers	Shank size, inches	Under collar size	Under collar length	Wgt. lbs., each
1013R	1 Hex. x 4 1/4	1 1/8" Rd.	14"	5 1/4
1014R	1 Hex. x 4 1/4	1 1/8" Rd.	18"	6 1/4
1019R	1 1/8 Hex. x 6	1 1/2" Rd.	14"	6 1/2
1020R	1 1/8 Hex. x 6	1 1/2" Rd.	18"	8
1023R	1 1/4 Hex. x 6	1 3/8" Rd.	14"	7 3/4
1024R	1 1/4 Hex. x 6	1 3/8" Rd.	18"	9 1/2

Super-service narrow chisel bit



Catalog Numbers	Shank size, inches	Under collar size	Under collar length	Wgt. lbs., each
925R	1 Hex. x 4 1/4	1 1/8" Rd.	14"	5 1/4
926R	1 Hex. x 4 1/4	1 1/8" Rd.	18"	6 1/4
1030R	1 1/8 Hex. x 6	1 1/4" Rd.	14"	6 3/4
1031R	1 1/8 Hex. x 6	1 1/4" Rd.	18"	8 1/4
1034R	1 1/4 Hex. x 6	1 3/8" Rd.	14"	8
1035R	1 1/4 Hex. x 6	1 3/8" Rd.	18"	9 3/4

Super-service 3 inch chisel bit



Catalog Numbers	Shank size, inches	Under collar size	Under collar length	Wgt. lbs., each
936R	1 Hex. x 4 1/4	1 1/8" Rd.	14"	6
937R	1 Hex. x 4 1/4	1 1/8" Rd.	18"	7
1040R	1 1/8 Hex. x 6	1 1/4" Rd.	14"	7 1/4
1041R	1 1/8 Hex. x 6	1 1/4" Rd.	18"	8 1/2
1042R	1 1/4 Hex. x 6	1 3/8" Rd.	14"	8 1/4
1043R	1 1/4 Hex. x 6	1 3/8" Rd.	18"	10

Standard moil point



Catalog Numbers	Shank size, inches	Under collar length	Wgt. lbs., each
1010	7/8 Hex. x 3 1/4	12"	2 3/4
1011	7/8 Hex. x 3 1/4	14"	3 1/4
1012	7/8 Hex. x 3 1/4	18"	4
1013	1 Hex. x 4 1/4	14"	4 1/2
1014	1 Hex. x 4 1/4	18"	5 1/2
1015	1 Hex. x 4 1/4	24"	6 3/4
1019	1 1/8 Hex. x 6	14"	6
1020	1 1/8 Hex. x 6	18"	7 1/2
1021	1 1/8 Hex. x 6	24"	9
1023	1 1/4 Hex. x 6	14"	7 1/2
1024	1 1/4 Hex. x 6	18"	9
1025	1 1/4 Hex. x 6	24"	11 1/2

Vulcan superkut® chisel



Catalog Numbers	Shank size, inches	Under collar size	Under collar length	Wgt. lbs., each
913	1 Hex. x 4 1/4	1 1/8" rd.	14"	6
9136	1 Hex. x 4 1/4	1 1/8" rd.	16"	6 1/2
914	1 Hex. x 4 1/4	1 1/8" rd.	18"	7
915	1 1/8 Hex. x 6	1 1/4" rd.	14"	7
9156	1 1/8 Hex. x 6	1 1/4" rd.	16"	7 3/4
917	1 1/8 Hex. x 6	1 1/4" rd.	18"	8 1/2
916	1 1/4 Hex. x 6	1 3/8" rd.	14"	8 1/4
9166	1 1/4 Hex. x 6	1 3/8" rd.	16"	9 1/4
918	1 1/4 Hex. x 6	1 3/8" rd.	18"	10

By actual test this outstanding tool will break up re-enforced concrete faster with less effort than any other tool. Will outlast any wedge point tool 3 to 1 without re-sharpening or a moil point up to 10 to 1. Don't be satisfied with imitations—specify the original superkut® and know the difference.

Standard narrow chisel bit



Catalog numbers	Shank size, inches	Under collar length	Wgt. lbs., each
923	7/8 Hex. x 3 1/4	14"	3 1/4
924	7/8 Hex. x 3 1/4	18"	4
925	1 Hex. x 4 1/4	14"	4 1/2
926	1 Hex. x 4 1/4	18"	5 1/2
927	1 Hex. x 4 1/4	24"	6 3/4
1030	1 1/8 Hex. x 6	14"	6
1031	1 1/8 Hex. x 6	18"	7 1/2
1032	1 1/8 Hex. x 6	24"	9
1034	1 1/4 Hex. x 6	14"	7 1/2
1035	1 1/4 Hex. x 6	18"	9
1036	1 1/4 Hex. x 6	24"	11 1/2

Standard 3 inch chisel bit



Catalog numbers	Shank size, inches	Under collar length	Wgt. lbs., each
934	7/8 Hex. x 3 1/4	14"	3 1/2
935	7/8 Hex. x 3 1/4	18"	4 1/4
936	1 Hex. x 4 1/4	14"	4 3/4
937	1 Hex. x 4 1/4	18"	5 3/4
1040	1 1/8 Hex. x 6	14"	6 3/4
1041	1 1/8 Hex. x 6	18"	7 3/4
1042	1 1/4 Hex. x 6	14"	8 1/4
1043	1 1/4 Hex. x 6	18"	9 3/4

Frost wedge



Length under collar 17 1/2 inches.

Catalog numbers	Shank size inches	Wedge size, top	Wedge size, length	Wgt. lbs., each
810	1 Hex. x 4 1/4	1 3/4" Sq.	12"	9
812	1 1/8 Hex. x 6	2" Sq.	12"	12 1/2
813	1 1/4 Hex. x 6	2" Sq.	12"	14

VULCAN PAVING BREAKER TOOLS

Asphalt cutter



Length under collar 11 inches; blade size 5 inches wide by 6 inches long.

Catalog numbers	Shank size, inches	Wgt. lbs., each
943	1 Hex. x 4 1/4	7 1/4
1045	1 1/8 Hex. x 6	8 1/2
1046	1 1/4 Hex. x 6	9 1/4

Clay spade—heavy



Blade size 5 1/2 inches wide, 8 1/2 inches long.

Catalog numbers	Shank size, inches	length over-all	Wgt. lbs., each
972	1 Hex. x 4 1/4	21"	7 1/4
1075	1 1/8 Hex. x 6	23"	8 1/2
1077	1 1/4 Hex. x 6	23"	11

Digging chisel



Blade width 3 inches. Length under collar 15 1/2 inches.

Catalog numbers	Shank size, inches	Blade length	Wgt. lbs., each
946	1 Hex. x 4 1/4	10"	7
1048	1 1/8 Hex. x 6	12"	8 1/2
1049	1 1/4 Hex. x 6	12"	11

Also furnished with shank to fit Clay Diggers.

Splitting wedge with shims



An excellent tool for splitting rock or concrete where the use of dynamite would be dangerous.

Catalog numbers	Shank size, inches	Length of wedge	Weight lbs. complete
815	1 Hex. x 4 1/4	12"	13 1/4
817	1 1/8 Hex. x 6	12"	14 1/4
818	1 1/4 Hex. x 6	12"	15 1/4

Used in a 2 inch drill hole at least 12 inches deep.

Rock breaker



Catalog numbers	Shank size, inches	Diameter of taper large end	small end	Wgt. lbs., each
840	1 1/8 Hex. x 6	2"	1"	9 1/2
841	1 1/8 Hex. x 6	2 1/4"	1 1/4"	11 1/4
842	1 1/8 Hex. x 6	2 1/2"	1 1/2"	13
843	1 1/4 Hex. x 6	2"	1"	10 1/2
844	1 1/4 Hex. x 6	2 1/4"	1 1/4"	12 1/4
845	1 1/4 Hex. x 6	2 1/2"	1 1/2"	14

Designed for breaking large boulders or concrete. Breaking pressure exerted by simply driving into a drilled hole at least 12 inches deep. Standard length under collar 14 1/2 inch. Taper length 8 inches.

Asphalt wedge



A double purpose tool for asphalt or concrete pavement. Stronger and more durable than a 3 inch chisel bit. Blade width 3 inches.

Catalog numbers	Shank size, inches	Length under collar	Wgt. lbs., each
836	1 Hex. x 4 1/4	12"	7
837	1 1/8 Hex. x 6	12"	8
838	1 1/4 Hex. x 6	12"	9 1/4

Dirt tamper — square



Detachable shank. Forged steel base.

Catalog numbers	Shank size, inches	Base size	Length over-all	Wgt. lbs., each
968	1 Hex. x 4 1/4	6"	12 3/4"	16
969	1 Hex. x 4 1/4	6"	12 3/4"	22
1070	1 1/8 Hex. x 6	6"	14 1/2"	17
1071	1 1/8 Hex. x 6	8"	14 1/2"	23
1072	1 1/4 Hex. x 6	6"	15"	18
1073	1 1/4 Hex. x 6	8"	15"	24

Dirt tamper—round



Detachable shank. Forged steel base, 6 3/4 inch diameter.

Catalog numbers	Shank size, inches	Length over-all	Wgt. lbs., each
965	1 Hex. x 4 1/4	13 1/4"	21
1067	1 1/8 Hex. x 6	14 1/2"	22
1068	1 1/4 Hex. x 6	15"	23

Sheathing driver



Detachable shank. Forged steel shoe, 5 inches wide.

Catalog numbers	Shank size, inches	To fit wood sheathing	Length over-all	Wgt. lbs., each
949	1 Hex. x 4 1/4	2"	14 3/4"	22 1/2
1051	1 1/8 Hex. x 6	2"	16 1/2"	23 1/2
1052	1 1/8 Hex. x 6	3"	16 1/2"	26
1053	1 1/4 Hex. x 6	2"	17 1/2"	24
1054	1 1/4 Hex. x 6	3"	17 1/2"	27

Detachable shank



For tamper bases and sheathing drivers.

Catalog numbers	Shank size, inches	Length over-all	Wgt. lbs., each
865	1 Hex. x 4 1/4	13 1/4"	4 1/4
867	1 1/8 Hex. x 6	15"	5 1/4
868	1 1/4 Hex. x 6	15"	6 1/4

VULCAN PAVING BREAKER TOOLS

Pipe driver



For pipe sizes from 3/4 inch to 2 inch I. D.

Shank sizes, 1 inch by 4 1/4 inch, 1 1/8 inch by 6 inch, 1 1/4 by 6 inch. Length under collar 11 inches.

Pipe driver head




(Two piece combination type)

Use with Detachable Tamper Shank, sizes 1 inch by 4 1/4 inch, 1 1/8 inch by 6 inch, 1 1/4 inch by 6 inch.

Cat. No. 1825 for 1 inch, 1 1/4 inch and 1 1/2 inch pipe.
Cat. No. 1826 for 1 1/4 inch, 1 1/2 inch and 2 inch pipe.

Pipe driver point

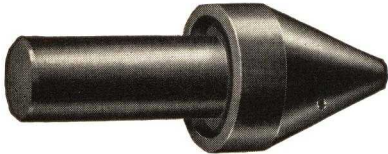

To prevent damage to driven pipe and mill wrap if used.
For pipe sizes from 3/4 inch to 2 inch.

Ground rod driver



Shank sizes, 1 inch by 4 1/4 inch, 1 1/8 inch by 6 inch, 1 1/4 inch by 6 inch. Driving socket from 1 1/16 inch to 1 1/8 inch inside diameter 3 inches deep.

Length under collar 9 inches.

Form pin driver



Driving socket 1 1/2 inch dia., 3/4 inch deep.

Catalog numbers	Shank size, inches	Length Under collar	Wgt. lbs., each
825	1 Hex. x 4 1/4	8"	5
827	1 1/8 Hex. x 6	8"	6 1/4
828	1 1/4 Hex. x 6	8"	6 1/2

Bushing tool




Made in all shank sizes for Paving Breakers and Clay Diggers.

Bushing face with 16 teeth, 1 3/4 inch and 2 inch square.

VULCAN CLAY DIGGER TOOLS

Clay spade or scoop

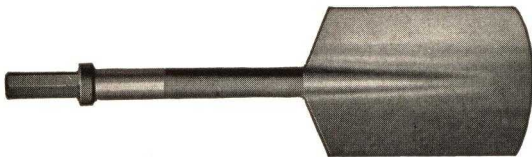

Standard Blade is 5 1/2 inches wide, 8 1/2 inches long. Also furnished with 4 1/2 inch wide blade. Length under collar, 16 1/2 inches.

Catalog numbers	Shank size	Shank length	Wgt. lbs., each
1078	3/4" Sq.	2 3/4"	6 1/4
1079	7/8" Hex.	2 3/4"	6 1/2
1080	3/4" Hex. rd.	2 3/4"	6 1/4
1081	7/8" Hex. rd.	3 1/4"	6 1/2
982	7/8" Hex.	3 1/4"	6 1/2

Clay digger chisel



Pointed with moil point or chisel bit for light demolition work or core breaking.

Made from 1 inch or 1 1/8 inch round steel with shank sizes as listed under Clay Spade.

Standard lengths, 12 inches, 15 inches and 18 inches under collar.

Note: On all Clay Digger tools it is important to specify the steel size under collar to insure correct fit in the steel retainer sleeve. Name hammer make and model when possible.

3 inch flat pick



Blade is 3 inches wide, 7 1/2 inches long. Length under collar 16 inches.

Catalog numbers	Shank size,	Shank length	Wgt. lbs., each
1530	3/4" Sq.	2 3/4"	4 1/2
1531	7/8" Hex.	2 3/4"	5
1532	3/4" Hex. rd.	2 3/4"	4 1/2
1533	7/8" Hex. rd.	3 1/4"	5
1534	7/8" Hex.	3 1/4"	5
1535	1" Hex.	4 1/4"	5 1/2

Axe blade



Width of blade 4 1/2 inches. Length under collar 12 inches.

Catalog numbers	Shank size	Shank length	Wgt. lbs., each
820	3/4" Sq.	2 3/4"	3 1/4
821	7/8" Hex.	2 3/4"	3 3/4
822	3/4" Hex. rd.	2 3/4"	3 1/4
823	7/8" Hex. rd.	3 1/4"	3 3/4
824	7/8" Hex.	3 1/4"	3 3/4
825	1" Hex.	4 1/4"	4 1/4

VULCAN ROCK DRILL STEELS

Detachable bit rods (hollow)



Timken



Jack-bit



Carset jack-bit

Size of steel	Size of shank	Timken thread types	Jack-bit thread types	Carset jack bit thread types
7/8" Hex.	7/8" Hex. x 3 1/4"	E-S-A-F-H	0-1	115-116H
1" Round	7/8" Hex. x 3 1/4"	F-H-D	1-2	115-116H-119D
1" Hex.	1" Hex. x 4 1/4"	H	1	115-116H
1 1/8" Round	1" Hex. x 4 1/4"	H-D	1-2-3	115-116H-119D
1 1/8" Round	Lug	H-D	1-2-3	115-116H-119D
1 1/4" Round	Lug	H-D	2-3	115-116H-119D

Vulcan Drill Steel Shanks and Threads are carefully made to meet recognized standards to insure dependable performance of both rods and bits.

Solid drill steels



Size of steel	Size of Shank	Length under collar
7/8" Hex.	7/8" Hex. x 3 1/4"	12", 18", 24"
1" Hex.	1" Hex. x 4 1/4"	12", 18", 24"
1 1/8" Hex.	1 1/8" Hex. x 6"	18", 24", 30"
1 1/4" Hex.	1 1/4" Hex. x 6"	18", 24", 30"

Bit sizes from 1 1/2 inch to 2 inch, four point only.

Hollow drill steels




For small holes. Length under collar 18".			
Catalog numbers	Size of shank	Size of bit	Drilling depth
525	7/8" Hex. x 3 1/4"	3/4"	6"
526	7/8" Hex. x 3 1/4"	7/8"	8"
527	7/8" Hex. x 3 1/4"	1"	8"
528	7/8" Hex. x 3 1/4"	1 1/8"	12"
529	7/8" Hex. x 3 1/4"	1 1/4"	12"

Made with 4-point bit unless otherwise specified.

VULCAN GRANITE AND CONCRETE CUTTING TOOLS

Hand bush hammer

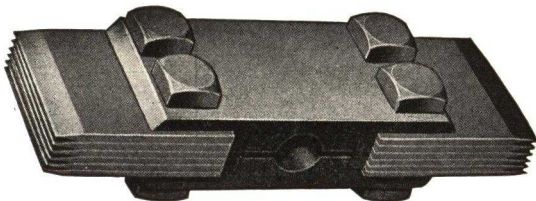

Catalog numbers	Jaw opening	Blades per end	Wgt. lbs., each
1193	7/8"	4	9
1194	7/8"	6	9
1196	5/8"	4	4 3/4
1197	5/8"	5	4 3/4
1198	5/8"	6	4 3/4


Caution—This hammer must not be used on concrete unless it is dry and well seasoned.

Concrete bush chisel



Cat. No. 1316—Length, 8 inches. Weight, 2 1/4 pounds.

Solid bush hammer

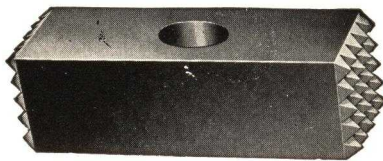

Catalog numbers	Stock size	Length over-all	No. teeth each end	Wgt. lbs., each
1199	1 1/4" Sq.	5 1/2"	9	2
1200	1 1/2" Sq.	5 1/2"	9 or 16	3
1201	1 3/4" Sq.	5 1/2"	16 or 25	4
1202	2" Sq.	5 1/4"	16 or 25	5
1203	2" Sq.	6 1/4"	16 or 25	6

Concrete chipping hammer



For roughing concrete surfaces before applying water-proofing compound.
Cat. No. 1318—Size, 2 inches wide, 9 inches long. Weight, 4 pounds.


VULCAN GRANITE AND CONCRETE CUTTING TOOLS

Hand bull point



Octagon steel in sizes from 3/4 inch to 1 1/2 inch diameter. Popular lengths, 12 inches, 18 inches, 24 inches.

Hand set or pitching tool



Made in several sizes with blade from 1 3/8 inch to 2 inch wide.

Hand chisel



Popular size, 7/8 inch steel 9 inches long. Other sizes to order.

Bush chisel



Used for surfacing granite or concrete with chipping hammer. Shank .680 inch rd. 2 3/8 inches long. Fitted with 4 or 6 blades in 3/4 inch opening. Length overall 9 inches.

Hand plug drill



Size stock, 3/4 inch. Over-all, 18 inches. Bit size, 5/8 or 3/4 inch. Weight, 2 pounds.

Brick chisel



Sharpened with long chisel point. Steel size, 3/4 inch. Lengths, 12 inch, 15 inch, 18 inch.

Hand point



Plug drill bit



Used for drilling small holes up to 4 inches deep in hard granite with chipping hammer. Shank .680 inch rd. 2 3/8 inches long. Bit size 5/8 inch or 3/4 inch. Length overall 18 inches.




Wedges and shims

Catalog numbers	Suitable for hole drilled	Wedge size at top	Wedge length	Weight lbs., per set
1303	5/8"	9/16" x 1/2"	3 1/2"	1/3
1305	3/4"	5/8" x 1/2"	4"	1/2
1306	1 1/4"	3/4" x 7/8"	6"	1 3/4
1307	1 3/8"	7/8" Sq.	8"	2 1/4
1308	1 1/2"	1" Sq.	10"	3 3/4
1309	1 1/2"	1" Sq.	12"	4 3/4
1310	1 3/4"	1 1/4" Sq.	12"	7 1/2
1311	2"	1 1/2" Sq.	12"	10
1312	1 3/4"	1 1/4" Sq.	15"	10
1313	2"	1 1/2" Sq.	15"	13
1314	1 3/4"	1 1/4" Sq.	18"	12
1315	2"	1 1/2" Sq.	18"	15 1/2

A set consists of one wedge and two shims.

VULCAN CONSTRUCTION TOOLS


Grab chain

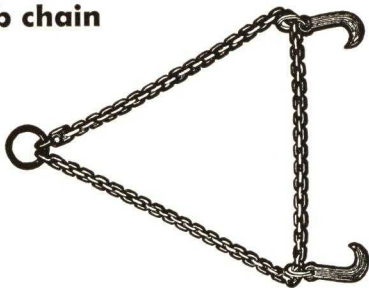

Fitted with stone (lifting) dogs as shown.

Catalog numbers	Chain size	Chain length	Capacity, tons	Wgt. lbs.
1385	1/2"	12'	4	50
1386	5/8"	14'	6	90
1387	3/4"	16'	9	160

Timber tong

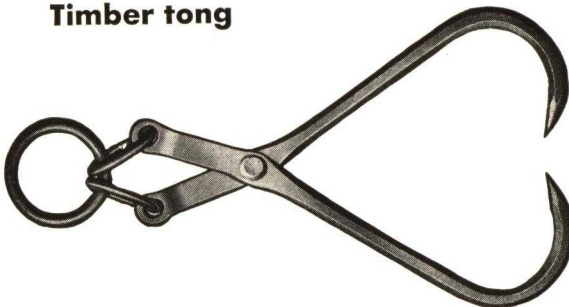

Catalog numbers	Capacity, pounds	Max. opening	Wgt. lbs.
1364	1,000	18"	16
1365	2,000	24"	23
1366	3,000	30"	28

VULCAN CONSTRUCTION TOOLS

Pin lewis

Catalog numbers	Pin size	length
1375	5/8"	4"
1376	3/4"	4 1/2"
1377	7/8"	5"
1378	1"	6"
1379	1 1/8"	7"
1380	1 1/4"	7"

Used in pairs for lifting building stone.



Stone (lifting) dog

Catalog numbers	Chain size	Capacity tons	Wgt. per pair lbs.
1388	1/2"	4	14
1389	5/8"	6	25
1390	3/4"	9	44


Used with Grab Chain shown on preceding page.




Sheathing clamp

Catalog numbers	Plank size
1348	2"
1349	3"

Depth of opening 8".

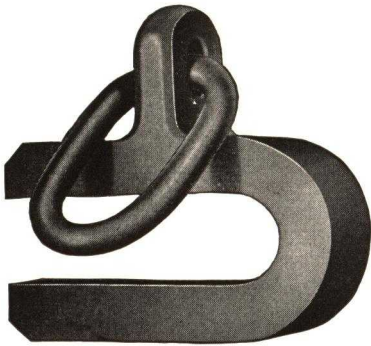


Calking hammer

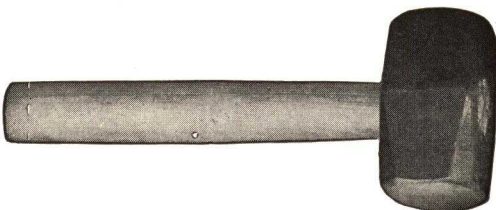

Sizes 2 1/2, 3, 3 1/2 and 4 pounds. Furnished with 10 inch handle.

Building wreckers' adze

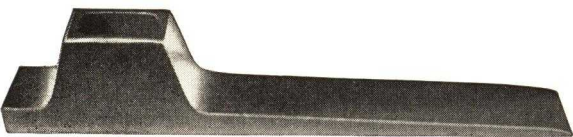

Used for lifting boards or flooring to save the lumber for further use. Rectangular eye takes Standard Pick Handle slightly squared on end. Overall length 15 inches. Width of blade 2 1/8 inches. Weight 5 lbs. Catalog number 1335.

Calking tool



Made from 7/8 inch steel. Blade 1/8 inch to 3/4 inch thick.

Yarning tool



Cat. No. 1513—Blade 1/8 inch thick, 4 inches long. Over-all 10 inches. These tools are the heavy type used for water and gas mains.

Hose spanner



Made in sizes to fit from 1 1/2 inch to 4 inch. Pin-Lug suction hose couplings.

Diamond point dog chisel



For cutting cast iron pipe. Cat. No. 1514—Length 7 1/2 inches; weight 3 1/8 pounds.

VULCAN BRICK CLAMPS

Malleable



Cat. No. 1336M—Weight 5 1/2 lbs.

Pressed steel



Cat. No. 1336S—Weight 4 1/2 lbs.

Both types readily adjustable to take from 6 to 10 bricks. Strong and durable for long service.

VULCAN STRUCTURAL STEEL WORKERS TOOLS

Straight dolly bar



Offset dolly bar



Catalog numbers		Rivet size	Stock size	Length
Straight	Offset			
1428	1434	3/8"	1 1/2"	24"
1429	1435	1/2"	1 5/8"	24"
1430	1436	5/8"	1 3/4"	24"
1431	1437	3/4"	2"	30"
1432	1438	7/8"	2"	30"
1433	1439	1"	2 1/8"	30"

Construction chisel



Cat. No. 1455—Length, 7 inches. Weight, 3 1/2 pounds.

Rivet buster or side set



Cat. No. 1462—Length, 7 1/2 inches. Weight 3 1/4 pounds.

Rivet tong



Over-all length, 18 inch, 24 inch and 30 inch.

Connecting bar



Catalog numbers	Stock size	Over-all length	Wgt. lbs., each
1464	3/4"	24"	3 1/4
1465	3/4"	30"	4
1466	7/8"	24"	4 1/4
1467	7/8"	30"	5 1/2
1468	1"	24"	5 3/4
1469	1"	30"	7
1470	1"	36"	8 1/2

VULCAN TIE TAMPER BARS

Plain face



Face dimension from 5/8 inch x 3 inch to 3/4 inch x 5 inch.
Standard shank size 7/8" Hex. x 2 9/16" long. Overall length 20" or 24".

Heel dolly



Over-all length, 48 inches.

Catalog numbers	Rivet size	Wgt. lbs., each
1440	5/8"	18
1441	3/4"	20
1442	7/8"	20
1443	1"	23

Holding-on sledge (spring dolly)



Steel handle, 48 inches long.

Catalog numbers	Rivet size	Handle size	Wgt. lbs., each
1444	3/8"	1"	16
1445	1/2"	1"	16
1446	5/8"	1 1/8"	21
1447	3/4"	1 1/8"	22
1448	7/8"	1 1/8"	22
1449	1"	1 1/4"	28

Backing-out punch



Made in sizes from 3/8 inch to 1 inch.

Structural wrench



Light weight but durable. Made to fit standard sq. nuts on bolt sizes from 1/2 inch to 1 inch.

Structural drift pin



Catalog numbers	Steel size	Over-all length	Aver. Wt. 100 pcs.
1412	7/16"	6"	21
1413	9/16"	6 1/2"	37
1414	1 1/16"	7"	57
1415	1 3/16"	7 1/2"	83
1416	1 5/16"	8"	120
1417	1 11/16"	8 1/2"	150
1418	1 3/4"	9"	200
1419	1 5/8"	9"	250

Tooth face



Face dimension 3/4 inch x 5 inch.

VULCAN CHIPPING AND ELECTRIC HAMMER TOOLS

Shank types



Type A round



Type B differential



Type C hexagon



No. 2 round retainer



No. 3 hexagon retainer



Type F round collared retainer
Also furnished with type "FO" oval collar



Type G hexagon collared retainer
Also furnished with type "GO" oval collar



A or B taper (for Star Drills)



Type J round (for Star Drills)

Point types

Blank



Bull Point



Cape chisel



Flat chisel



Diamond pt.
chisel




Rd. nose
cape chisel



Scaling chisel



Bushing tool

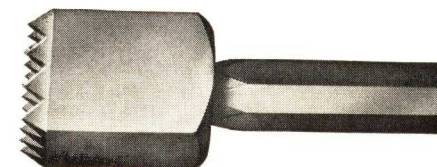

Calking tool



Joint cutter



Star drill



Since there is much variation in the shank dimensions required for various pneumatic and electric hammers it is important when ordering that the shank type as well as the make and size of hammer be specified.

Whenever possible give the manufacturers model or part number. See latest Vulcan catalog for complete listing.